


OP-924 GENERAL PURPOSE HANGING SCALE




FEATURES

- Economical, lightweight and hand held general purpose crane scale
- Features an easy to read, backlit LED or LCD display
- Measured values in either pounds (lb) or kilograms (kg)
- Powered using a rechargeable battery pack (up to 80 hours)
- The standard remote controller allows users to change units, clear measurements, zero and tare out weight
- Remote controller can capture peak weight at a distance of up to 100ft. (30m)

PART#	CAPACITY	WEIGHT	PART#	CAPACITY	WEIGHT
LED DISPLAY			LCD DISPLAY		
OP-924A-500	500 lbs x 0.1 lbs / 250 kgs	12 lbs	OP-924B-500	500 lbs x 0.1 lbs / 250 kgs	12 lbs
OP-924A-1000	1000 lbs x 0.2 lbs / 500 kgs	12 lbs	OP-924B-1000	1000 lbs x 0.2 lbs / 500 kgs	12 lbs
OP-924A-1500	1500 lbs x 0.5 lbs / 750 kgs	12 lbs	OP-924B-1500	1500 lbs x 0.5 lbs / 750 kgs	12 lbs
OP-924A-2000	2000 lbs x 0.5 lbs / 1000 kgs	17 lbs	OP-924B-2000	2000 lbs x 0.5 lbs / 1000 kgs	17 lbs
OP-924A-3000	3000 lbs x 0.5 lbs / 1500 kgs	17 lbs	OP-924B-3000	3000 lbs x 0.5 lbs / 1500 kgs	17 lbs

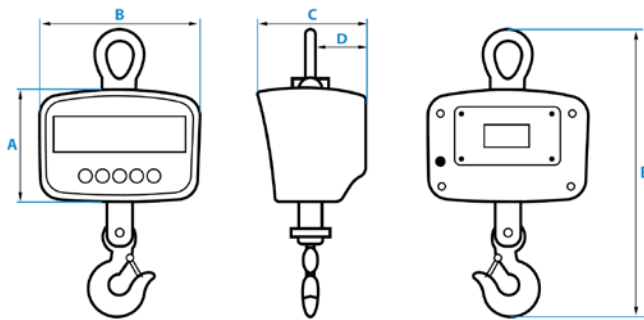

EXTERIOR DIMENSIONS				
A	B	C	D	E
5.88"	8.50"	5.75"	2.91"	15.16"-17.13"

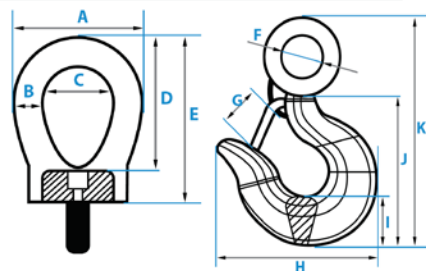

HOOK DIMENSIONS										
A	B	C	D	E	F	G	H	I	J	K
UP TO 2,000 LBS.										
2.55"	0.60"	1.35"	2.65"	3.25"	0.90"	0.90"	2.92"	0.96"	3.15"	4.92"
OVER 2,000 LBS.										
2.55"	0.60"	1.35"	2.65"	3.25"	1.22"	1.15"	3.57"	1.25"	3.90"	6.50"





OPTIMA SCALE MANUFACTURING INC.

9030 BRIDGEPORT PLACE
RANCHO CUCAMONGA, CA 91730
800.360.9619 | SALES@OPTIMASCALE.COM

OP-925 HEAVY DUTY CRANE SCALE



6K lb to 20k lb
LCD



40K lb
Front LED



40K lb
Back LCD



60K lb to 100k lb
LED

6K lb to 20k lb
LED

FEATURES

- Durable cast aluminum housing, ideal for harsh environments
- Features an easy to read, backlit LED or LCD display
- Measured values in either pounds (lb) or kilograms (kg)
- Powered using a rechargeable battery pack (up to 80 hours)
- Wireless remote controller allows users to change units, clear measurements, zero and tare out weight
- Remote controller can capture peak weight at a distance of up to 100ft. (30m)

PART#	CAPACITY	SHIP WT.	PART#	CAPACITY	SHIP WT.
LED DISPLAY			LCD DISPLAY		
OP-925A-6000	6000 lbs x 1 lbs	26 lbs	OP-925B-6000	6000 lbs x 1 lbs	26 lbs
OP-925A-10000	10,000 lbs x 2 lbs	30 lbs	OP-925B-10000	10,000 lbs x 2 lbs	30 lbs
OP-925A-20000	20,000 lbs x 5 lbs	60 lbs	OP-925B-20000	20,000 lbs x 5 lbs	60 lbs
OP-925A-40000	40,000 lbs x 10 lbs	205 lbs	OP-925B-40000	40,000 lbs x 10 lbs	190 lbs
OP-925A-60000	60,000 lbs x 10 lbs	285 lbs			
OP-925A-80000	80,000 lbs x 20 lbs	370 lbs			
OP-925A-100000	100,000 lbs x 20 lbs	490 lbs			

WEST COAST HEADQUARTERS
9030 BRIDGEPORT PL.
RANCHO CUCAMONGA, CA 91730

800.360.9619

MIDWEST DIVISION
14310 NORTHDAL BLVD.
ROGERS, MN 55374

SALES@OPTIMASCALES.COM


SOUTHEAST DIVISION
1005 UNION CENTER DR. STE B
ALPHARETTA, GA 30004

WWW.OPTIMASCALES.COM



OP-925 DIAGRAM


6K, 10K, 20K ▼

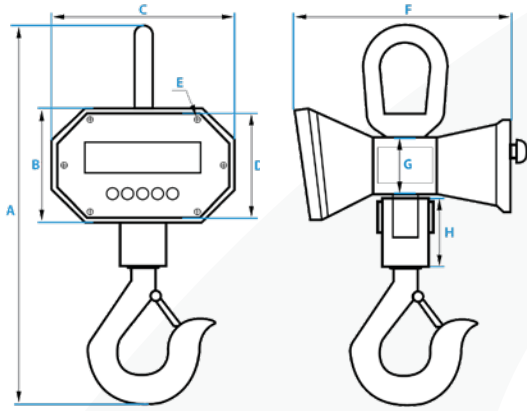

EXTERIOR DIMS. 6K, 10K, 20K			
A	B	C	D
18"; 26"; 29"	6.14"	9.83"	5.65"
E	F	G	H
0.28"	11.2"	2.97"	3.5";6.5";8.5"


Up to 10K lbs ▼

20K lbs ▼

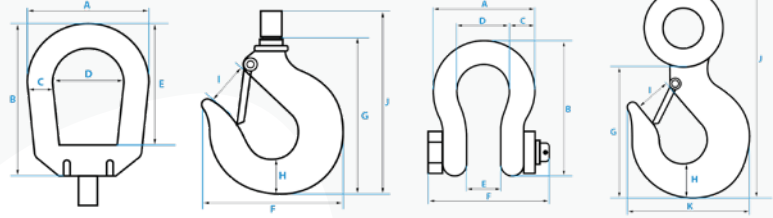


HOOK DIMENSIONS						
CAPACITY	A	B	C	D	E	F
6,000 lbs	4.52"	5.91"	0.95"	3.58"	4.72"	4.54"
10,000 lbs	5.40"	7"	1.25"	2.95"	1.92"	6.50"
20,000 lbs	6"	8"	1.40"	3.21"	2.21"	7.25"
CAPACITY	G	H	I	J	K	L
6,000 lbs	5.36"	1.45"	1.45"	6.06"	•	•
10,000 lbs	6.40"	1.91"	1.65"	9.50"	6"	•
20,000 lbs	8.00"	2.40"	2.00"	12.20"	7.00"	•

40,000 lbs ▼

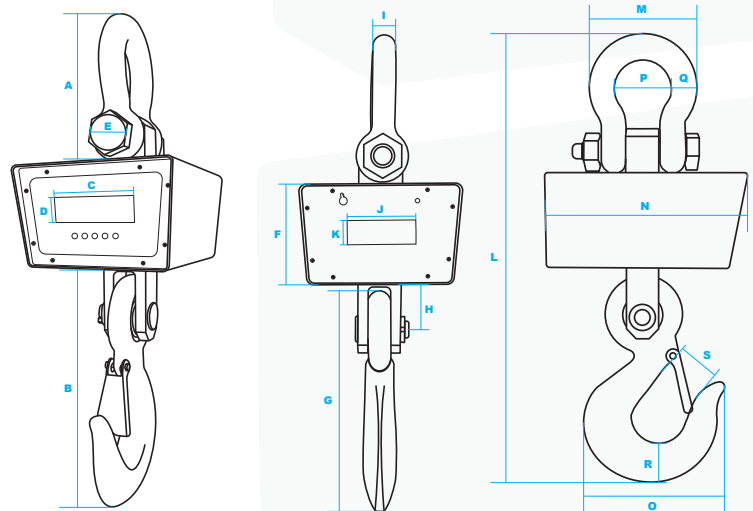

60K-100K lbs ▼

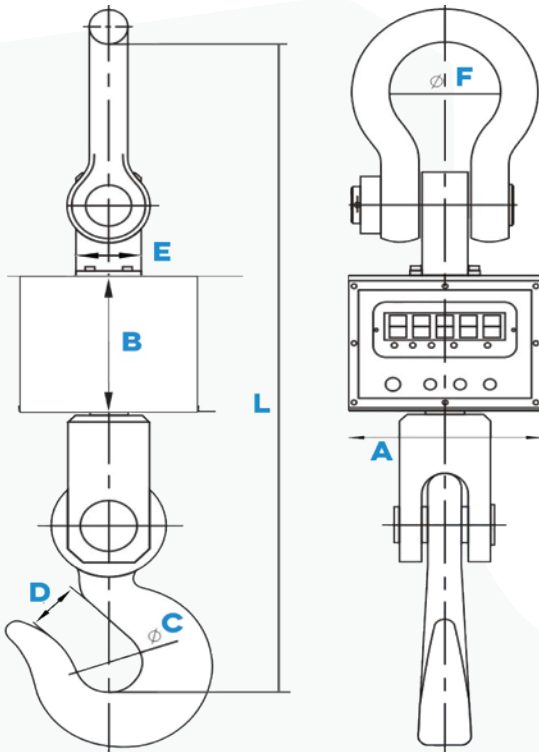

40K LB CAPACITY DIMENSIONS									
A	B	C	D	E	F	G	H	I	J
5.5"	20"	6"	1.2"	2.9"	7.5"	17"	4.5"	1.95"	5"
K	L	M	N	O	P	Q	R	S	T
1.6"	40"	9.25"	15.75"	13.25"	5"	2.25"	4"	3.4"	•

60K-100K lbs ▼

60K-100K LB CAPACITY DIMENSIONS							
CAPACITY	A	B	C	D	E	F	L
60,000 lbs	9.29"	6.25"	5.11"	4.72"	8.34"	5.90"	39.05"
80,000 lbs	11.81"	8.46"	5.90"	5.11"	11.81"	8.42"	47.75"
100,000 lbs	11.81"	8.46"	5.90"	5.11"	11.81"	8.42"	47.75"

OPTIMA SCALE MANUFACTURING INC.

WEST COAST HEADQUARTERS
9030 BRIDGEPORT PL.
RANCHO CUCAMONGA, CA 91730

MIDWEST DIVISION
14310 NORTHDAL BLVD.
ROGERS, MN 55374

SOUTHEAST DIVISION
1005 UNION CENTER DR. STE B
ALPHARETTA, GA 30004

800.360.9619

SALES@OPTIMASCALES.COM

WWW.OPTIMASCALES.COM





OPTIMA SCALE MANUFACTURING INC.

9030 BRIDGEPORT PLACE
RANCHO CUCAMONGA, CA 91730
800.360.9619 | SALES@OPTIMASCALE.COM

OP-926 HANGING SCALE




FEATURES

- Pre-calibrated with certified test weights per NIST's requirements
- More accurate than standard crane scale
- Bi-directional for both tension and compression
- Nickel plated IP67 corrosion resistant load cell
- ABS sealed indicator with LED or LCD display and rechargeable battery
- Peak hold and average hold features
- Selectable weighing units: lb, kg
- 19' load cell cable (longer cables available)
- Eye bolts included
- Optional RS232 port for printer or computer

PART#	CAPACITY	SHIP WT.
OP-926-100	100 lb x .01 lb/50 kg	8 lbs
OP-926-250	250 lb x .02 lb/120 kg	
OP-926-500	500 lb x .05 lb/250 kg	
OP-926-1000	1,000 lb x 0.1 lb/500 kg	
OP-926-2000	2,000 lb x 0.2 lb/1000 kg	
OP-926-3000	3,000 lb x 0.5 lb/1500 kg	11 lbs
OP-926-5000	5,000 lb x 0.5 lb/2500 kg	
OP-926-10000	10,000 lb x 1 lb/5K kg	32 lbs
OP-926-20000	20,000 lb x 2 lb/10K kg	

OPTIONS/ACCESSORIES

- Indicator Upgrade
- Waterproof hard case
- Scoreboard
- Indicator stand
- Software

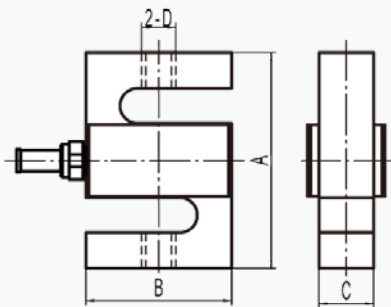

RATED CAPACITY	DIMENSIONS				RATED CAPACITY	DIMENSIONS			
	A	B	C	D		A	B	C	D
lb/inches					kg/mm				
50-200	2.50	2.00	0.75	1/4-28UNF-2B	25	63.50	50.80	12.70	M6
250-300	2.50	2.00	0.75	3/8-24UNF-2B	50-70	63.50	50.80	12.70	M6
500-1,500	2.50	2.00	1.00	1/2-20UNF-2B	100-700	63.50	50.80	19.05	M12
2K-3K	3.00	2.00	1.00	1/2-20UNF-2B	1,000-1,500	76.20	50.80	25.40	M12
5K-10K	4.25	3.00	1.25	3/4-16UNF-2B	2,000-5,000	107.95	76.20	25.40	M20x1.5
15K	5.50	4.00	1.25	1-12UNF-2B	7,000	139.70	101.60	31.75	M20x1.5
20K	7.00	5.00	2.00	1 1/4UNF-12UNF-2B	10,000	177.80	127.00	50.80	M30x2
40K	7.50	5.50	2.50	1 1/2UNF-12UNF-2B	20,000	190.50	139.70	63.50	M38

WEST COAST HEADQUARTERS
9030 BRIDGEPORT PL.
RANCHO CUCAMONGA, CA 91730

800.360.9619

SALES@OPTIMASCALES.COM

MIDWEST DIVISION
14310 NORTHDAL BLVD.
ROGERS, MN 55374

SOUTHEAST DIVISION
1005 UNION CENTER DR. STE B
ALPHARETTA, GA 30004

WWW.OPTIMASCALES.COM





OPTIMA SCALE MANUFACTURING INC.

9030 BRIDGEPORT PLACE
RANCHO CUCAMONGA, CA 91730
800.360.9619 | SALES@OPTIMASCALE.COM

OP-927 TENSION LINK SCALE




FEATURES

- Cost effective solution for processing, monitoring and controlling overhead loads
- Used with shackles to measure force
- Designed to measure high capacity load for cranes, hoists and winches
- Nickel plated IP67 corrosion resistant load cell
- ABS sealed indicator with LED or LCD display and rechargeable battery
- Peak hold and average hold features
- Selectable weighing units: lb and kg
- 26' load cell cable (longer options available)

OPTIONS/ACCESSORIES

- Indicator Upgrade
- Waterproof hard case
- Scoreboard
- Indicator stand
- Software

PART#	CAPACITY	SHIP WT.
OP-927-50	50,000 lb x 10 lb	33 lbs
OP-927-100	100,000 lb x 50 lb	46 lbs
OP-927-200	200,000 lb x 100 lb	95 lbs

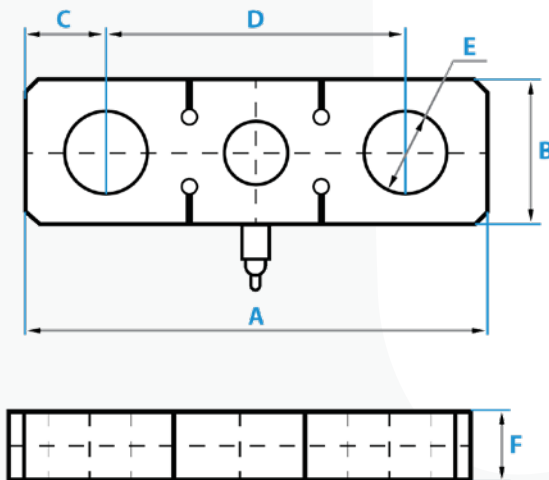

RATED CAPACITY	DIMENSIONS					
	A	B	C	D	E	F
lb/inches						
25K lbs	11.15	3.55	7.21	1.87	1.50	1.97
50K lbs	12.53	4.33	8.27	2.01	1.69	2.13
100K lbs	16.55	5.12	11.82	2.81	1.97	2.36
150K lbs	19.70	6.30	13.79	3.15	2.36	2.96
200K lbs	21.67	6.70	14.97	3.80	2.76	3.35
250K lbs	23.64	7.09	15.76	4.02	3.15	3.94
kg/mm						
4,536-18,144 kg	283.00	90.00	183.00	50.00	38.00	50.00
22,680 kg	318.00	110.00	210.00	51.00	43.00	54.00
45,360 kg	420.00	130.00	300.00	71.40	50.00	60.00
68,040 kg	500.00	160.00	350.00	80.00	60.00	75.00
90,720 kg	550.00	170.00	380.00	96.40	70.00	85.00
113,400 kg	600.00	180.00	400.00	102.00	80.00	100.00

